


Self-Propelled Scissor Lifts

GS™-1930

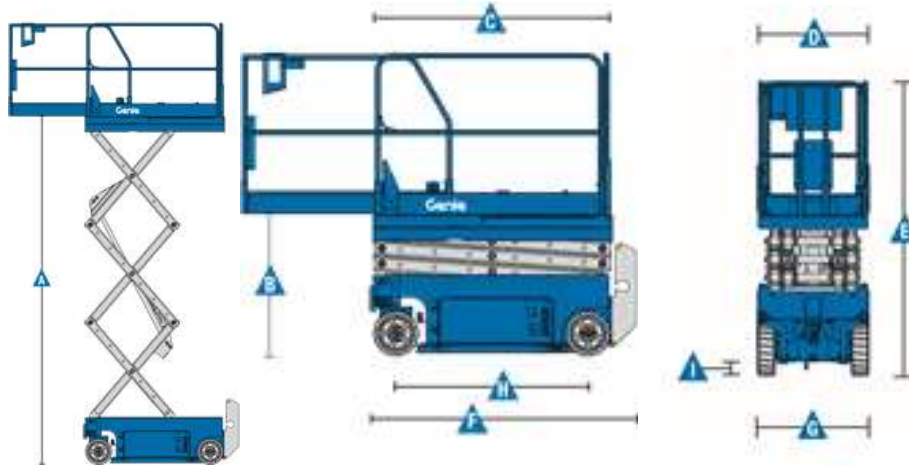

Brand	Genie
Model	GS-1930
Working height maximum - indoor	7.79 m
- outdoor	6.47 m
A Platform height maximum - indoor	5.85 m
- outdoor	4.47 m
B Platform height stowed	1.00 m
C Platform length - outside	1.66 m
Extended	2.55 m
Roll-out platform extension deck	0.91 m
D Platform width - outside	0.76 m
Guardrail height	1.1 m
Toeboard height	15 cm
E Height-stowed: folding rails	2.12 m
rails folded	1.76 m
F Length-stowed	1.83 m
Length-stowed extended	2.74 m
G Width	0.76 m
H Wheelbase	1.32 m
I Ground clearance-center	6 cm
- with pothole guards deployed	2 cm

Power	
Power source	24 V DC (four 6 V 225 Ah batteries)
Hydraulic system capacity	14.2 L

Productivity	
Maximum platform occupancy (in/out)	2/1
Lift capacity	227 kg
Lift capacity - extension deck	113 kg
Drive height	full height
Drive speed - stowed	4.0 km/h
Drive speed - raised	0.8 km/h
Gradeability - stowed	25%
Turning radius - inside	Zero
Turning radius - outside	1.55 m
Raise / lower speed	16 / 22 sec
Tilt sensor activation - front to back	3°
- side to side	1.5°
Controls	proportional
Drive	dual front wheel
Multiple disc brakes	dual rear wheel
Tires - solid non-marking	30.5 x 11.5 cm

Weight3 / Floor Loading	
Weight - ANSI, CSA	1,505 kg
Tire load, maximum	662 kg
Tire contact pressure	1,118 kPa
Occupied floor pressure	13.6 kPa