


Self-Propelled Scissor Lifts

GS™-5390RT

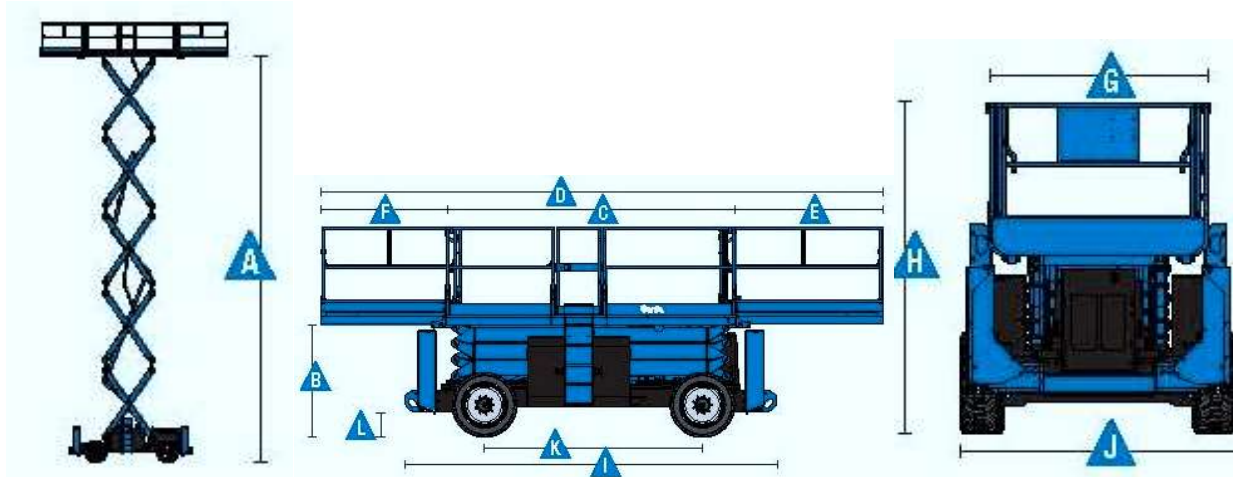

Brand	Genie
Model	GS-5390RT
Working height maximum	18.15 m
A Platform height maximum	16.15 m
B Platform height - stowed	2.02 m
C Platform length:	3.98 m
outside, extended - single deck	5.34 m
D outside, extended - dual deck	6.57 m
E Slide-out platform extension deck - front	1.52 m
F Slide-out platform extension deck - rear	1.22 m
G Platform width - outside	1.83 m
H Height: stowed	3.15 m
stowed - rails lowered	2.47 m
I Length - stowed: single deck	-
dual deck	-
with outriggers	4.88 m
Length - extended: single deck	5.40 m
dual deck	6.57 m
J Width: standard tires	2.36 m
high flotation tires	2.57 m
K Wheelbase	2.84 m
L Ground clearance - center	0.36 m

Weight / Floor Loading	
Weight - ANSI/CSA	-
- with outriggers	7,515 kg
Tire load, maximum	2,401 kg
Tire contact pressure	890 kPa
Occupied floor pressure	8.94 kPa

Productivity	
Maximum platform occupancy	6
Lift capacity	680 kg
Lift capacity - extension deck	227 kg
Drive height	9.14 m
Drive speed - stowed	6.4 km/h
Drive speed - raised	1.1 km/h
Gradeability - stowed	40%
Maximum outrigger leveling:	
front to back	7°
side to side	12°
Turning radius - inside	2.16 m
Turning radius - outside	5.33 m
Raise / lower speed	55 / 49 sec
Controls	proportional
Drive	four wheel
Tires - foam-filled rough terrain	30 x 84 cm

Power	
Power source	Ford MSG 425 4 cylinder gas/LPG 75hp (56kW)
	Deutz 48hp Tier 4f D2.9L4 diesel
Auxiliary Power unit	12 V DC
Fuel tank capacity	113.6 L
Hydraulic system capacity	113.6 L